

Compressor Technical Data

Model **GP12TB** Code **355000306616**

HMBP

General Data

Refrigerant:	R134a
Application:	HMBP
Evaporating Temperature Range:	-25°C to +10°C
Voltage/Frequency:	220-240V 50Hz 1~
Compressor Cooling:	Fan Cooling
Expansion Device:	Capillary / Valve
Packaging Quantity:	Multi - 96:120 pcs
Approvals:	VDE-CE-GOST



Mechanical Data

Oil Charge:	350 cm ³
Oil Type Configuration:	ester
Oil Type Viscosity:	19 cSt
Weight:	11.2 kg

Electrical Data

Motor Type:	CSIR
Voltage working range at 50 Hz:	187-264V
Maximum Motor Temperature:	130°C
Locked Rotor Current:	14.0 A
Start Winding Resistance:	17.84 Ω at 25°C
Run Winding Resistance:	5.81 Ω at 25°C
Phase :	1 ph

External Characteristics

Internal Diameter	(mm)
Suction Connector	8.1
Discharge Connector	6.5
Process Connector	8.1
Material	Copper

Electrical Components


Component Type	
Starting Device:	RELAY MTRP43
Motor Protection:	T0181/xx
Start Capacitor	47-56μf

MCMC compressors reserves the right to change the data without prior notice




10th of Ramadan City - (Cairo) Egypt
Industrial Zone A-2
P.o Box : 1001 (10th of Ramadan)
Tel. : 0554 - 413322 (10 lines)
Fax. : 0554 - 413161 - 413029
Web site : <http://www.zmcegypt.com>







CSIR

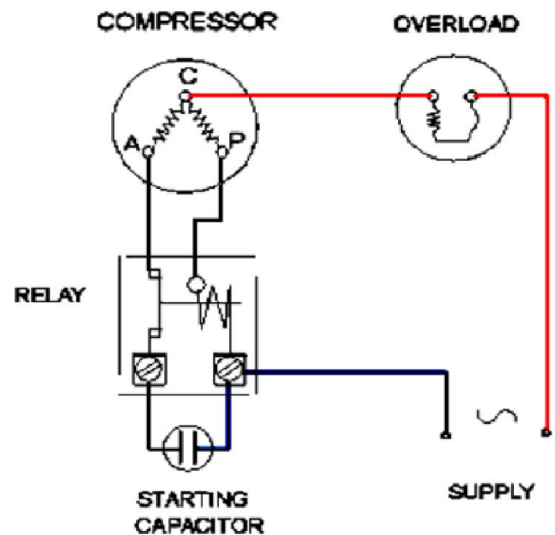

Recommended Transport
Positions when fitted into
appliances



العاشر من رمضان
المنطقة الصناعية أ - ٢
ص.ب : ١٠٠١ العاشر من رمضان
تليفون : ٤١٣٣٢٢ - ٠٥٥٤ (١٠ خطوط)
فاكس : ٤١٣١٦١ - ٤١٣٠٢٩ (٠٥٥٤)

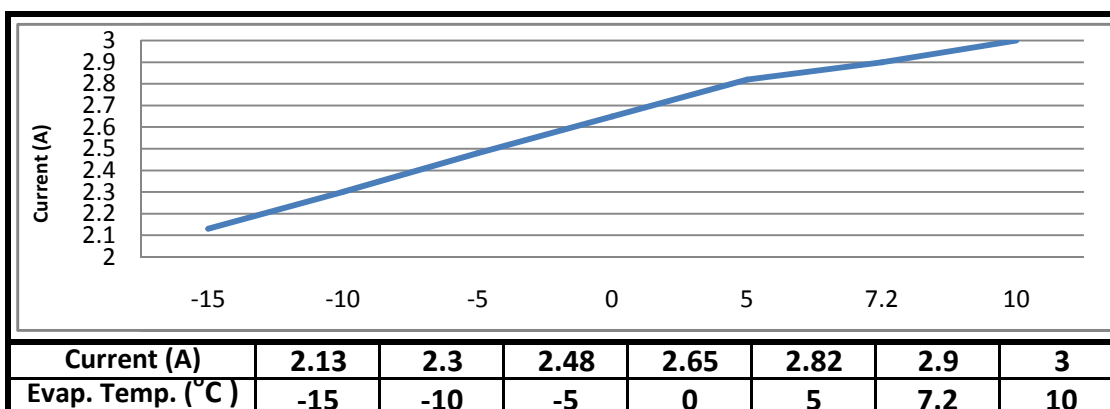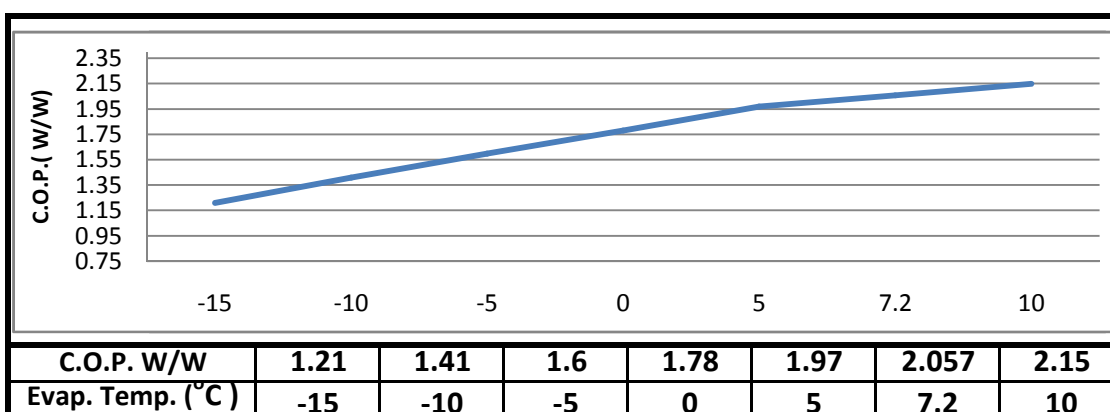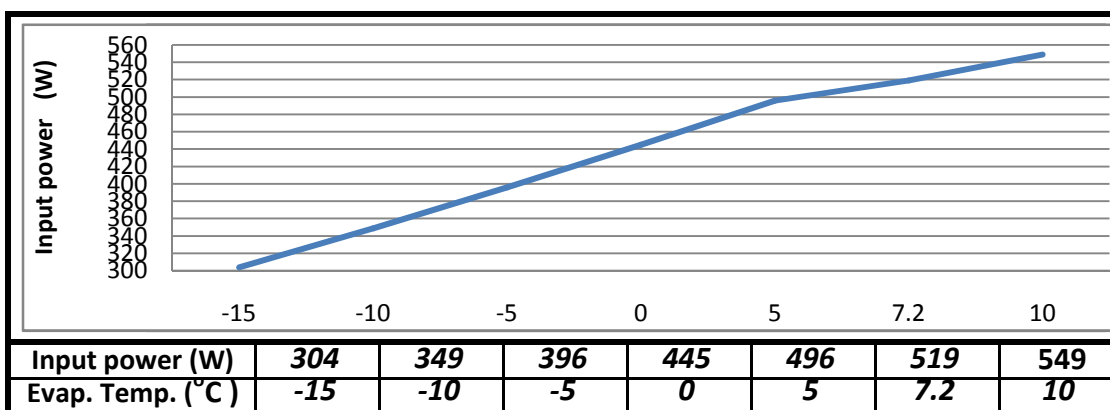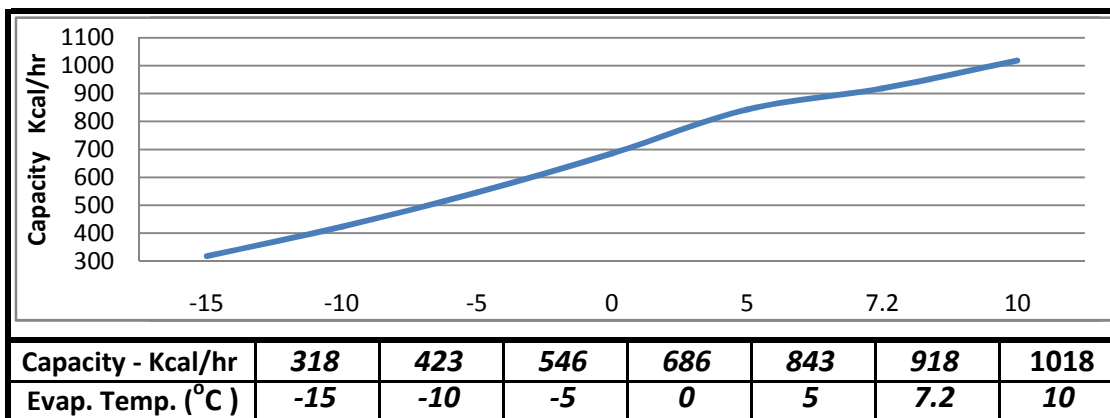PERFORMANCE CURVE DATA :

Test Condition: Ashrae, Fan Cooling, Return Gas:35 °C , Ambient: 35°C Subcooling 46 °C, Evaporating: 7.2 oC, Condensing: 55°C


10th of Ramadan City - (Cairo) Egypt
Industrial Zone A-2

P.o Box : 1001 (10th of Ramadan)

Tel. : 0554 - 413322 (10 lines)

Fax. : 0554 - 413161 - 413029


Web site : <http://www.zmcegypt.com>



العاشر من رمضان
المنطقة الصناعية أ - ٢
ص.ب : ١٠٠١ العاشر من رمضان
تليفون : ٤١٣٣٢٢ - ٠٥٥٤ (١٠ خطوط)
فاكس : ٤١٣١٦١ - ٤١٣٠٢٩ - ٠٥٥٤

GM, GN and GL models

HL and HP models

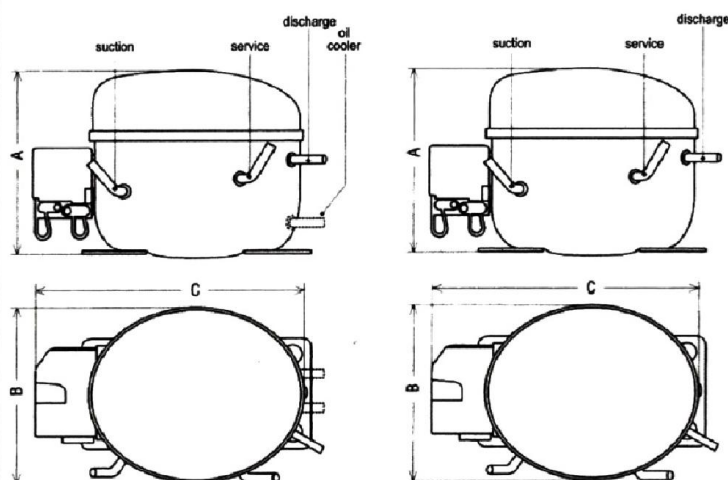

Standard dimensions for mounting hole centres: 170x70 mm


Special feet

Models	Distance between holes	Holes diameter
GM/GN/HL/HP/GP	165 x 101.6	4 x 19
	170 x 70	6 x 165


Tube internal diameter "GM", "GN", "GL", "HL"	"HP" and "GP"		
Material	Suction	Service	Discharge
Copper steel / copper	6.1	6.1	4.9
Copper	6.1	6.1	5.1
Copper	6.5	6.5	4.9
Copper	8.1	8.1	6.5

Mounting accessories


Standard



Standard



Terminal board 'A' for GL, GM, GN, HL and HP models

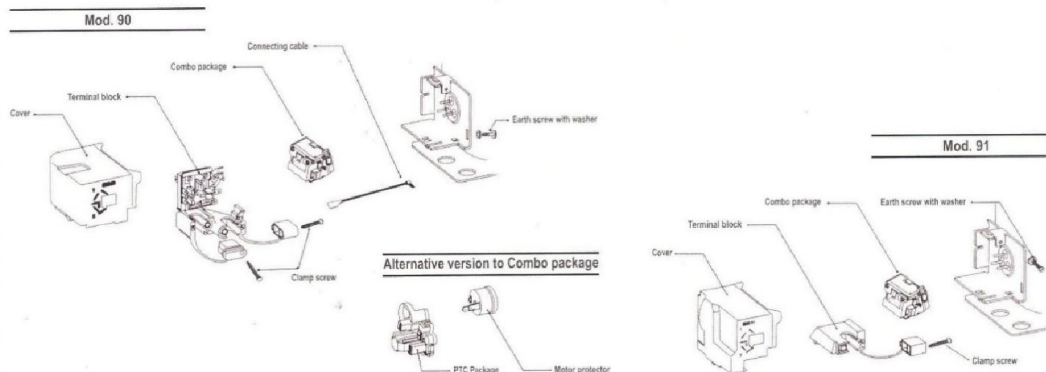

Terminal board 'B' for GL, GM, GN, HL and HP models

Terminal board

- 1 PTC starting device
- 2 Terminal block
- 3 Cable clamp supplement
- 4 Cable clamp
- 5 Cable clamp screw
- 6 Motorprotector
- 7 Motorprotector holder
- 8 Terminal cover
- 9 Terminal cover retention clip
- 10 Earth terminal
- 11 Motorprotector terminal holder

Functions:

L, N & Auxiliary terminals.

All with:


-2 fast-on 4,8 or 6,35 mm

-1 M 3,5 x 6 screws

Earth terminals

-2 fast-on 4,8 or 6,35 mm

-2 M 3,5 x 6 screws

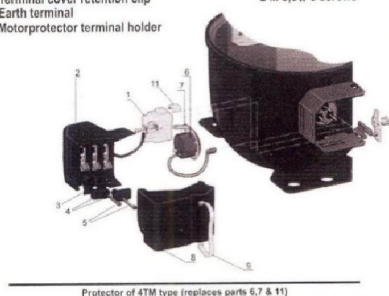

Protector of 4TM type (replaces parts 6, 7 & 11)


Standard

- 1 PTC starting device
- 2 Terminal block
- 3 Cable clamp supplement
- 4 Cable clamp
- 5 Cable clamp screw
- 6 Motorprotector
- 7 Motorprotector holder
- 8 Terminal cover
- 9 Terminal cover retention clip
- 10 Earth terminal
- 11 Motorprotector terminal holder

Earth terminals

-2 fast-on 4,8 or 6,35 mm

-2 M 3,5 x 6 screws

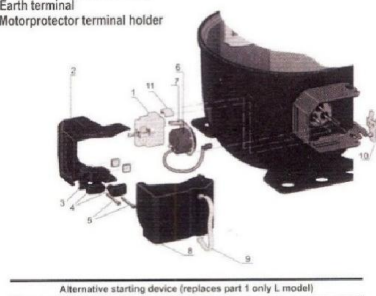

Alternative starting device (replaces part 1 only (L model))

